



Inel de otel tip MS

Specificatii tehnice


Material: grad 80, otel aliat

Factor de siguranta: MBL echivalent cu 4 X sarcina maxima de lucru

Standard: EN 1677-4 sau DIN 5688

Finisaj: vopsit galben

Certificare: certificat de testare se poate elibera la cerere

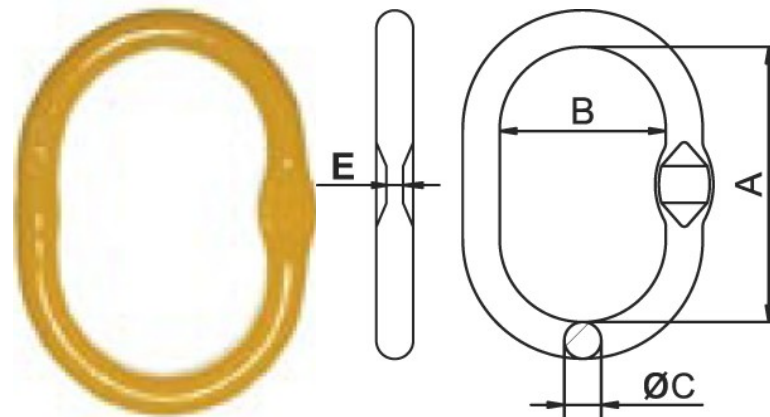

Tabel cu dimensiuni

COD	Diametru lant				Dimensiuni in mm				Portanta tone	Fora de rupere tone	Greutate unitara Kg
	1 BRAT	2 BRATE			A	B	ØC	E			
		30°	45°	60°							
MS 13	6/7	-	6	6/7	100	60	13	6.6	1.6	6.4	0.32
MS 16	8	7	7/8	8	120	70	16	6.8	3.1	12.4	0.59
MS 18	10	8	10	10	135	75	18	8.8	4.5	18	0.82
MS 20	13	10	-	13	150	90	20	8.8	6.2	24.8	1.14
MS 22	16	-	13	16	150	90	22	11	8	32	1.41
MS 25	18	13	-	18	170	95	25	13	10.6	42.4	2.03
MS 28	19	-	16	19	200	120	28	13	12	48	3.02
MS 30	20/22	16	18	20/22	200	120	30	16	15	60	3.51
MS 36	-	18/19	19/20	-	250	150	36	16	20	80	6.27
MS 38	26	20	22	26	250	150	38	20	25	100	7.05
MS 44	-	22	26	-	280	170	44	20.5	30	120	9.60
MS 45	32	26	-	32	300	200	45	22	37	148	12.12
MS 50	-	-	32	-	300	200	50	-	50	200	15.21
MS 55	-	32	-	-	350	200	55	-	63	252	20.50
MS 70	-	-	-	-	400	250	70	-	100	400	39.30
MS 80	-	-	-	-	400	250	80	-	125	500	52.80