

E-mail: office@kinetech.ro Mobil: 0768-463.636 Mobil: 0723-694.919 Mobil: 0765-998.277 Mobil: 0766-360.062

## **Excavator hook type GH**

• Material : alloy steel, grade 8, quenched and tempered


Safety factor : MBL equals 4 x WLLFinish : painted yellow (J)

• Certification : at no extra charge this product can be supplied with a

works certificate, a 3.1 certificate and/or EC Declaration

of Conformity

• **Note** : respect welding instructions

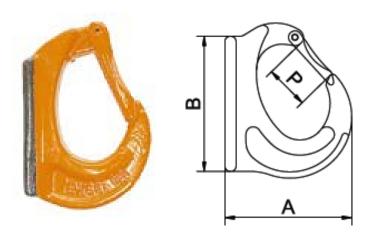

## **Dimensions table**

Code	WLL	Dimensions			BF	Weight
	t	Α	В	Р	t	Kg
GH 0.75	0.75	56	70	22	3.0	0.23
GH 1	1.00	71	78	25	4.0	0.48
GH 2	2.00	91	81	36	8.0	0.72
GH 3	3.00	104	104	39	12.0	1.07
GH 4	4.00	120	129	42	16.0	1.59
GH 5	5.00	136	146	47	20.0	2.32
GH 8	8.00	145	146	52	32.0	3.27
GH 10	10.00	178	193	77	40.0	6.07
GH 15	15.00	185	225	76	60.0	9.00