





Green Pin Sunken Hole Shackles – bow shackles with safety bolt Bow shackles with square hole screw pin code G-4169

- **Material** : bow and pin high tensile steel, Grade 6, quenched and tempered
- **Safety Factor** : MBL equals 6 x WLL
- **Standard** : meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- **Finish** : hot dipped galvanized
- **Certification** : at no extra charges this product can be supplied with a works certificate, certificate of basic raw material, manufacturer test certificate and/or EC Declaration of Conformity
- **Note** : key for unscrewing the pin must be ordered separately

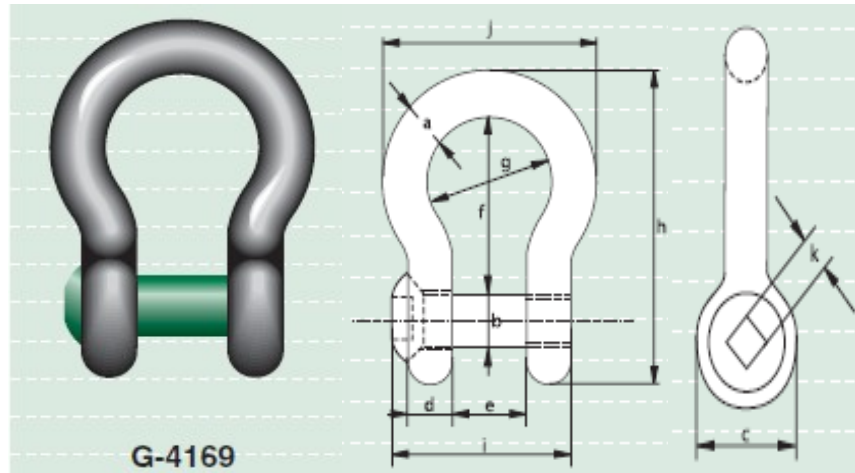

working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	size hole	weight each
tons	a	b	c	d	e	f	g	h	i	j	k	kg
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
2	13.5	16	34	13.5	22	51	32	91	51	76	10	0.31
3.25	16	19	40	16	27	64	43	114	53	93	10	0.56
4.75	19	22	47	19	31	76	51	136	74	107	10	0.98
6.5	22	25	53	22	36	83	58	157	85	123	12	1.46
8.5	25	28	60	25	43	95	68	176	99	141	12	2.18
9.5	28	32	67	28	47	108	75	197	110	158	16	3.06
12	32	35	74	32	51	115	83	218	122	176	16	4.24
13.5	35	38	80	35	57	133	92	240	135	192	16	5.59
17	38	42	89	38	60	146	99	262	145	208	16	7.37

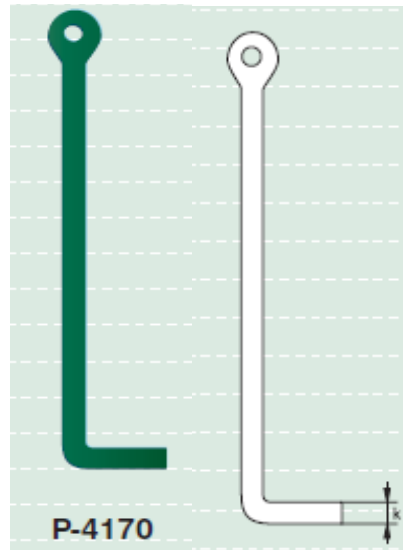

In inch

working load limit	diameter bow	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length	length bolt	width	size hole	weight each
tons	a inch	b inch	c inch	d inch	e inch	f inch	g inch	h inch	i inch	j inch	k inch	lbs
2	1/2	5/8	1 11/32	17/32	7/8	2	1 9/32	3 19/32	2	3	3/8	0.68
3.25	5/8	3/4	1 19/32	5/8	1 3/32	2 17/32	1 23/32	4 1/2	2 3/32	3 11/16	3/8	1.23
4.75	3/4	7/8	1 7/8	3/4	1 1/4	3	2	5 3/8	2 29/32	4 1/4	3/8	2.16
6.5	7/8	1	2 3/32	7/8	1 7/16	3 9/32	2 9/32	6 3/16	3 11/32	4 7/8	1/2	3.22
8.5	1	1 1/8	2 11/32	1	1 23/32	3 3/4	2 11/16	6 7/8	3 29/32	5 9/16	1/2	4.81
9.5	1 1/8	1 1/4	2 5/8	1 1/8	1 7/8	4 1/4	2 15/16	7 3/4	4 5/16	6 1/4	5/8	6.75
12	1 1/4	1 3/8	2 29/32	1 9/32	2	4 17/32	3 9/32	8 19/32	4 13/16	7	5/8	9.35
13.5	1 3/8	1 1/2	3 5/32	1 3/8	2 1/4	5 1/4	3 5/8	9 7/16	5 5/16	7 9/16	5/8	12.32
17	1 1/2	1 5/8	3 1/2	1 17/32	2 11/32	5 3/4	3 7/8	10 5/16	5 3/4	8 3/16	5/8	16.25