




G-hooks with tapered opening Type P-6765

- **Material** : high tensile steel, quenched and tempered
- **Safety Factor** : MBL equals 5 x WLL
- **Finish** : painted yellow
- **Certification** : test certificates can be supplied upon request

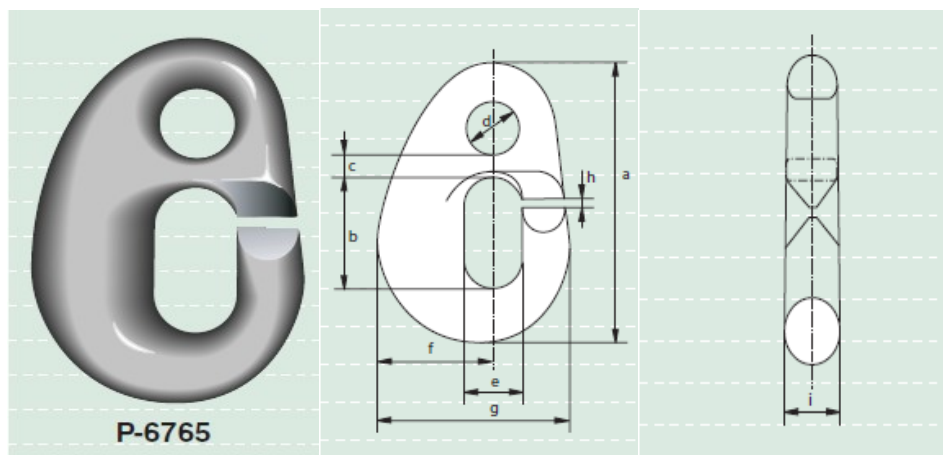

working load limit	length	length inside	width	diameter	width inside	width	width	width opening	thickness	weight per pce
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	kg
1.5	91	34	8	18	22	35	60	4	21	0.4
2.6	115	42	12	21	27	44	78	4	26	0.8
4	140	57	8	25	32	53	92	4	28	1.3
6	160	64	13	30	34	67	111	5	31	2.0