

E-mail: office@kinetech.ro Mobil: 0768-463.636 Mobil: 0723-694.919

Mobil: 0765-998.277 Mobil: 0766-360.062


Fishcon hooks with tapered opening Type P-6768

Material : high tensile steel, quenched and tempered

• Safety Factor : MBL equals 4 x WLL

• Finish : painted yellow

• Certification : test certificates can be supplied upon request

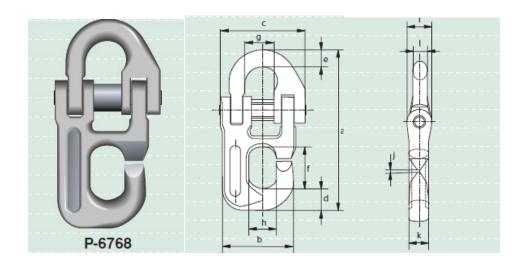

working load limit	length	width	width	length	length	length Inside	wldth Inside	width Inside	thickness	width opening	thickness	thickness	welght per pce
	а	b	С	d	е	f	g	h	T.	J	k	T.	
tons	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
3.2	159	70	83	21	17	41	28	26	24	2	20	14	1.6
5.3	185	84	103	27	21	42	34	31	28	2	25	17	2.1