



Kinotech Industry

Galati - Romania
 TEL./FAX: 0236-466.372
 TEL./FAX: 0236-313.013

www.kinotech.ro

E-mail: office@kinotech.ro

Mobil: 0768-463.636

Mobil: 0723-694.919

Mobil: 0765-998.277

Mobil: 0766-360.062

Master link assembly

Specifications


Material: grade 8, alloyed steel

Safety factor: MBL is 4 x WLL

Standard: EN 1677-4 formerly DIN 5688

Finish: painted yellow

Certification: test certificates can be supplied on request

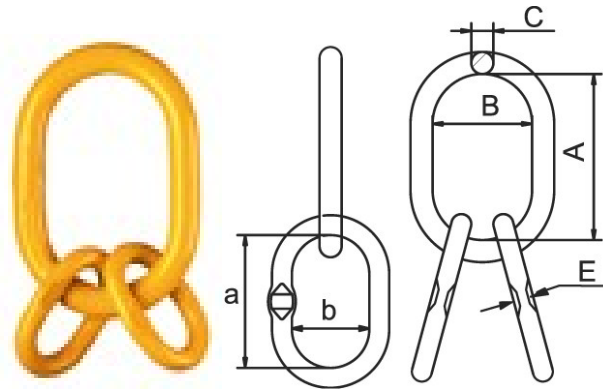

CODE	Chain diameter Ø			Dimensions in mm							WLL tons	Breaking force tons	Weight per piece Kg
	30°	45°	60°	A	B	ØC	E	a	b	Diameter			
MTS 16	-	6	6/7	120	70	16	6,7	100	60	13	2,5	10,0	1,20
MTS 18	6	7	8	135	75	18	7,4	100	60	16	3,5	14,0	1,80
MTS 22	7/8	8	10	150	90	22	8,9	120	70	18	6,5	26,0	2,90
MTS 25	10	10	13	170	95	25	10,6	120	70	20	8,5	34,0	3,90
MTS 28	-	-	-	200	120	28	11,0	120	70	20	10,0	40,0	4,90
MTS 30	-	13	16	200	120	30	13,4	135	75	22	13,0	52,0	6,00
MTS 36	13	16	18/19	250	150	36	16,6	135	75	25	17,0	68,0	9,60
MTS 38	-	-	20	250	150	38	17,1	170	95	28	20,0	80,0	12,60
MTS 44	16/18	18/19/20	22	280	170	44	18,0	200	120	33	27,0	108,0	19,70
MTS 45	19	-	-	300	200	45	20,0	200	120	36	30,0	120,0	22,50
MTS 50	20/22	22	26	300	200	50	21,0	150	90	38	40,0	160,0	24,50
MTS 55	-	26	32	300	200	55	23,0	150	90	38	50,0	200,0	28,00
MTS 58	26	-	-	350	200	58	-	150	90	42	60,0	240,0	34,60
MTS 70	-	32	-	400	250	70	-	300	150	55	80,0	320,0	74,70
MTS 80	32	-	-	400	250	80	-	300	150	58	100,0	400,0	92,40