



Kinotech Industry


Galati - Romania
TEL./FAX: 0236-466.372
TEL./FAX: 0236-313.013

www.kinotech.ro

E-mail: office@kinotech.ro
Mobil: 0768-463.636
Mobil: 0723-694.919
Mobil: 0765-998.277
Mobil: 0766-360.062

Green Pin Turnbuckles Hook-Hook – generally to ASTM F1145-92 code G-6312

- **Material** : drop forged high tensile steel SAE 1035 or 1045
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish** : hot dipped galvanized
- **Certification** : a works certificate or proof load test certificate can be supplied upon request

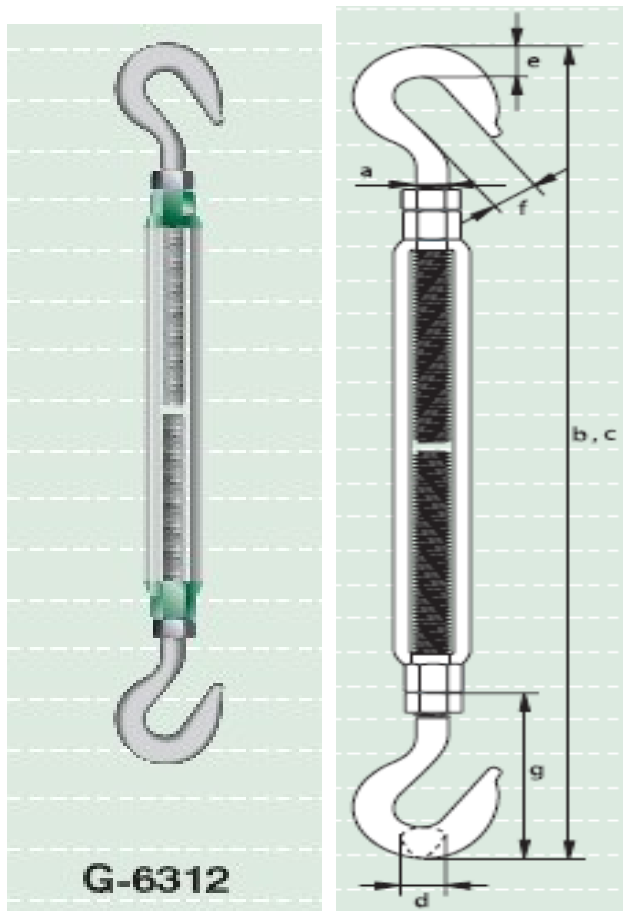



Kinotech Industry

Galati - Romania
TEL./FAX: 0236-466.372
TEL./FAX: 0236-313.013

www.kinotech.ro

E-mail: office@kinotech.ro
Mobil: 0768-463.636
Mobil: 0723-694.919
Mobil: 0765-998.277
Mobil: 0766-360.062

working load limit	diameter thread	take up	length closed position	length open position	thickness hook	thickness hook	opening hook	length closed position	weight per pce
tons	a inches	inches	b mm	c mm	d mm	e mm	f mm	g mm	kg
0.45	3/8	6	302	416	10	15	14	58	0.36
0.68	1/2	6	338	452	13	19	17	72	0.62
0.68	1/2	9	414	585	13	19	17	72	0.85
0.68	1/2	12	490	719	13	19	17	72	1.04
1.02	5/8	6	394	508	16	23	22	90	0.98
1.02	5/8	9	470	641	16	23	22	90	1.18
1.02	5/8	12	546	775	16	23	22	90	1.71
1.36	3/4	6	432	546	20	27	25	98	1.53
1.36	3/4	9	508	679	20	27	25	98	1.88
1.36	3/4	12	584	813	20	27	25	98	2.3
1.36	3/4	18	737	1080	20	27	25	98	2.85
1.81	7/8	12	625	854	23	30	29	126	3.33
1.81	7/8	18	778	1121	23	30	29	126	4.24
2.27	1	6	524	638	25	35	32	144	3.87
2.27	1	12	676	905	25	35	32	144	5.09
2.27	1	18	829	1172	25	35	32	144	6
2.27	1	24	980	1437	25	35	32	144	7.52
2.95	1 1/4	12	760	989	28	37	39	175	8.12
2.95	1 1/4	18	912	1255	28	37	39	175	10.4
2.95	1 1/4	24	1064	1521	28	37	39	175	12.1
3.4	1 1/2	12	823	1052	33	44	47	212	12.7
3.4	1 1/2	18	975	1318	33	44	47	212	15.1
3.4	1 1/2	24	1128	1585	33	44	47	212	17.1