




## Stainless steel lifting chain

- **Material** : AISI 316
- **Safety factor** : MBL equals 4 x WLL
- **Finish** : polished
- **Certification** : at no extra charge this product can be supplied with a works certificate, manufacturer test certificate and/or EC Declaration of Conformity

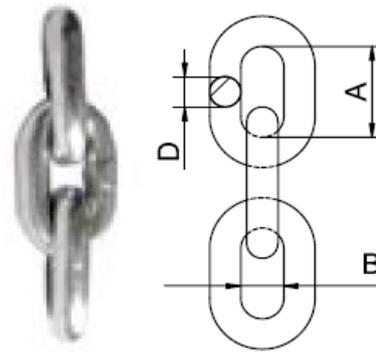

Code	WLL	Dimensions in mm			Links/m	BF	Weight
		t	D	A			
C 6 I	0.70	6	18	7.8	53.4	2.8	0.78
C 8 I	1.20	8	24	10.4	41.0	4.8	1.40
C 10 I	1.60	10	30	13.0	32.7	6.4	2.20
C 13 I	2.70	13	39	17.0	25.0	10.8	3.80

Working load limit table for stainless steel sling chains.

BF: breaking force

Chain Ø	90°						
	1 leg sling	2 leg sling		3 or 4 leg sling			Endless sling
	90°	0° <math>\beta \le 45^\circ</math> 0° <math>\alpha \le 90^\circ</math> Safety Factor 1.4	45° <math>\beta \le 60^\circ</math> 90° <math>\alpha \le 120^\circ</math> Safety Factor 1.0	0° <math>\beta \le 45^\circ</math> 0° <math>\alpha \le 90^\circ</math> Safety Factor 2.1	45° <math>\beta \le 60^\circ</math> 90° <math>\alpha \le 120^\circ</math> Safety Factor 1.5		
6	0.70	1.00	0.70	1.47	1.05	1.12	
8	1.20	1.70	1.20	2.50	1.80	1.92	
10	1.60	2.25	1.60	3.36	2.40	2.56	
13	2.70	3.80	2.70	5.70	4.05	4.32	