




Swivel, jaw-eye Code G-7723

- **Material** : high tensile steel, quenched and tempered
- **Safety factor** : MBL equals 5 x WLL
- **Standard** : generally to US Federal Spec. RR-C-271, Type VII, Class 3
- **Finish** : hot dipped galvanized
- **Certification** : test certificates can be supplied upon request

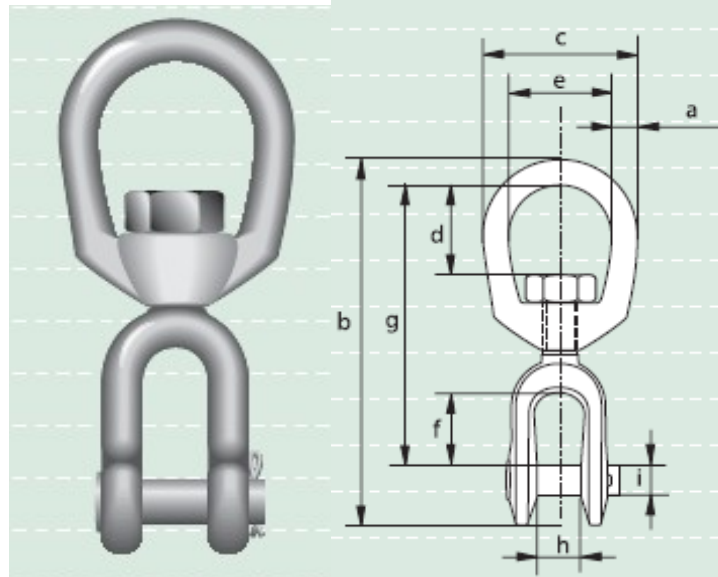

working load limit	diameter	length	width outside	length inside	width inside	length inside	length	width inside	diameter pin	weight per pce
tons	a	b	c	d	e	f	g	h	i	kg
	mm	mm	mm	mm	mm	mm	mm	mm	mm	
0.39	6	86	32	17	19	22	67	12	6	0.11
0.57	8	98	41	21	25	22	75	13	8	0.17
1.02	10	121	51	24	32	27	92	16	10	0.32
1.6	13	154	64	33	38	33	114	19	13	0.65
2.4	16	186	76	40	44	38	135	24	16	1.12
3.3	19	211	89	44	51	44	154	28	19	1.76
4.5	22	242	102	52	57	52	178	30	22	2.66
5.7	25	297	114	59	64	71	217	44	28	4.46
8.2	32	341	143	68	80	71	248	52	35	7.14
20.5	38	529	178	106	102	112	375	73	57	24.8