



Kinotech Industry

Galati - Romania
TEL./FAX: 0236-466.372
TEL./FAX: 0236-313.013


www.kinotech.ro

E-mail: office@kinotech.ro
Mobil: 0768-463.636
Mobil: 0723-694.919
Mobil: 0765-998.277
Mobil: 0766-360.062

Intinzatoare tip G-6312

Specificatii tehnice

- Material : Otel forjat SAE 1035 sau 1045
- Factor de siguranta : MBL inseamna 5 X sarcina maxima de lucru
- Standard : ASTM F1145-92 sau U.S. Federal Specification FF-T-791b
- Finisaj : baie galvanizata
- Certificare : Se elibereaza certificat de lucru sau de test la cerere

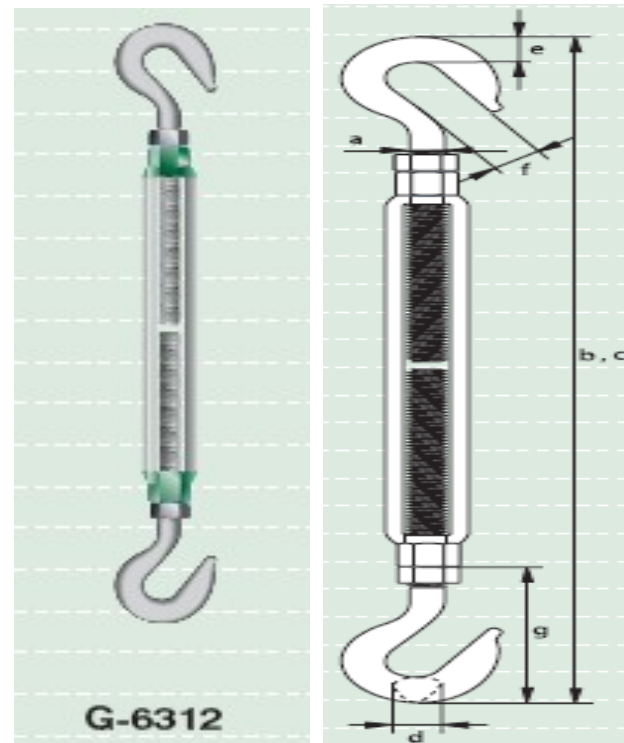

Tabel cu dimensiuni

Sarcina maxima lucru	Diametru filet	Take up	Lungime intinzator inchis	Lungime intinzator deschis	Grosime carlig	Latime carlig	Deschidere carlig	Lungime intinzator inchis	Greutate
tone	a mm	mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
0.45	9-10	152.4	302	416	10	15	14	58	0.36
0.68	13	152.4	338	452	13	19	17	72	0.62
0.68	13	228.6	414	585	13	19	17	72	0.85
0.68	13	304.8	490	719	13	19	17	72	1.04
1.02	16	152.4	394	508	16	23	22	90	0.98
1.02	16	228.6	470	641	16	23	22	90	1.17
1.02	16	304.8	546	775	16	23	22	90	1.71
1.36	18-20	152.4	432	546	20	27	25	98	1.53
1.36	18-20	228.6	508	679	20	27	25	98	1.88
1.36	18-20	304.8	584	813	20	27	25	98	2.30
1.36	18-20	457.2	737	1080	20	27	25	98	2.85
1.81	22	304.8	625	854	23	30	29	126	3.33
1.81	22	457.2	778	1121	23	30	29	126	4.24
2.27	24-25	152.4	524	638	25	35	32	144	3.87
2.27	24-25	304.8	676	905	25	35	32	144	5.09
2.27	24-25	457.2	829	1172	25	35	32	144	6
2.27	24-25	609.6	980	1437	25	35	32	144	7.52
2.27	32-34	304.8	760	989	28	37	39	175	8.12
2.27	32-34	457.2	912	1255	28	37	39	175	10.4
2.27	32-34	609.6	1064	1521	28	37	39	175	12.1
3.4	38-40	304.8	823	1052	33	44	47	212	12.7
3.4	38-40	457.2	975	1318	33	44	47	212	15.1
3.4	38-40	609.6	1128	1585	33	44	47	212	17.1