



Kinotech Industry

Galati - Romania
TEL./FAX: 0236-466.372
TEL./FAX: 0236-313.013

www.kinotech.ro
E-mail: office@kinotech.ro
Mobil: 0768-463.636
Mobil: 0723-694.919
Mobil: 0765-998.277
Mobil: 0766-360.062

Inel de otel tip MTS

Specificatii tehnice


Material: grad 80, otel aliat

Factor de siguranta: MBL echivalent cu 4 X sarcina maxima de lucru

Standard: EN 1677-4 sau DIN 5688

Finisaj: vopsit galben

Certificare: certificat de testare se poate elibera la cerere

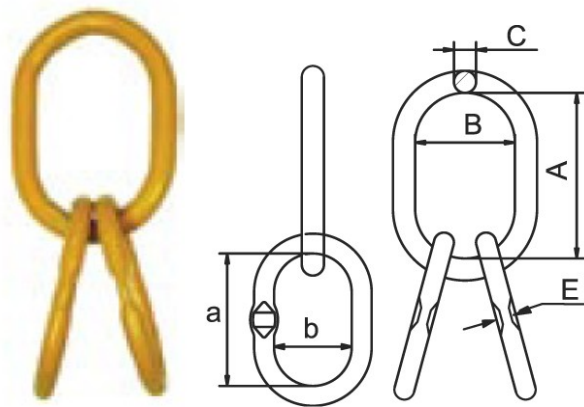

Tabel cu dimensiuni

COD	Diametru lant Ø			Dimensiuni in mm							Portanta tone	Fora de rupere tone	Greutate unitara Kg
	30°	45°	60°	A	B	ØC	E	a	b	Diametru			
MTS 16	-	6	6/7	120	70	16	6.7	100	60	13	2.5	10.0	1.20
MTS 18	6	7	8	135	75	18	7.4	100	60	16	3.5	14.0	1.80
MTS 22	7/8	8	10	150	90	22	8.9	120	70	18	6.5	26.0	2.90
MTS 25	10	10	13	170	95	25	10.6	120	70	20	8.5	34.0	3.90
MTS 28	-	-	-	200	120	28	11.0	120	70	20	10.0	40.0	4.90
MTS 30	-	13	16	200	120	30	13.4	135	75	22	13.0	52.0	6.00
MTS 36	13	16	18/19	250	150	36	16.6	135	75	25	17.0	68.0	9.60
MTS 38	-	-	20	250	150	38	17.1	170	95	28	20.0	80.0	12.60
MTS 44	16/18	18/19/20	22	280	170	44	18.0	200	120	33	27.0	108.0	19.70
MTS 45	19	-	-	300	200	45	20.0	200	120	36	30.0	120.0	22.50
MTS 50	20/22	22	26	300	200	50	21.0	150	90	38	40.0	160.0	24.50
MTS 55	-	26	32	300	200	55	23.0	150	90	38	50.0	200.0	28.00
MTS 58	26	-	-	350	200	58	-	150	90	42	60.0	240.0	34.60
MTS 70	-	32	-	400	250	70	-	300	150	55	80.0	320.0	74.70
MTS 80	32	-	-	400	250	80	-	300	150	58	100.0	400.0	92.40