




## Lant de ridicat de INOX

Material: AISI 316L

Factor de siguranta: 4

Finisaj: polisat

Certificare: certificat de testare se poate elibera la cerere

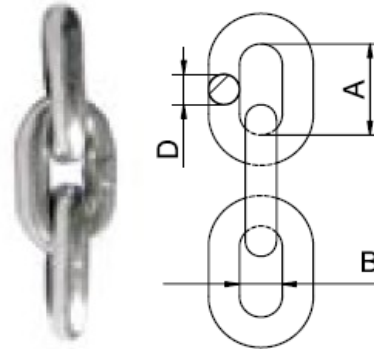

Tabel cu dimensiuni

Code	WLL	Dimensions in mm			Links/m	BF	Weight
		t	D	A		B	t
C 6 I	0.70	6	18	7.8	53.4	2.8	0.78
C 8 I	1.20	8	24	10.4	41.0	4.8	1.40
C 10 I	1.60	10	30	13.0	32.7	6.4	2.20
C 13 I	2.70	13	39	17.0	25.0	10.8	3.80

## Sarcina de lucru pe unghiuri

Working load limit table for stainless steel sling chains.

BF: breaking force

Chain Ø	90°					 Endless sling
	90°	2 leg sling		3 or 4 leg sling		
		0° <math>\beta \le 45^\circ</math> 0° <math>\alpha \le 90^\circ</math>	45° <math>\beta \le 60^\circ</math> 90° <math>\alpha \le 120^\circ</math>	0° <math>\beta \le 45^\circ</math> 0° <math>\alpha \le 90^\circ</math>	45° <math>\beta \le 60^\circ</math> 90° <math>\alpha \le 120^\circ</math>	
		Safety Factor 1.4	Safety Factor 1.0	Safety Factor 2.1	Safety Factor 1.5	
6	0.70	1.00	0.70	1.47	1.05	1.12
8	1.20	1.70	1.20	2.50	1.80	1.92
10	1.60	2.25	1.60	3.36	2.40	2.56
13	2.70	3.80	2.70	5.70	4.05	4.32